

Lecture 16 - Wacky Wednesday

ECE 459: Programming for Performance

Jon Eyolfson

University of Waterloo

February 8, 2012

Previous Lecture

- Difference between reentrant and thread-safe functions
- Assignment 1 solution
- Discussion of Assignment 2

Today's Talk

Do Time of Day and Developer Experience Affect Commit Bugginess?

Jon Eyolfson, Lin Tan, Patrick Lam

Originally presented: May 22, 2011

Goal

- Find correlation between commit “bugginess” vs. time-of-day, day-of-week and experience/commit frequency of developers
- Perhaps build prediction models to identify bugs or better allocate developer time
- Construct and make available database of bug introducing/fixing commits with useful metadata

Summary of Findings

- Commits between midnight and 4 AM are more likely to be buggy
- Commits between 7 AM and noon are less likely to be buggy
- More active developers commit fewer bugs
- More experienced developers commit fewer bugs
- The worst day of the week varies between projects

Example

Bug-fixing commit

```
Commit: 2cdc03fe ...
Author: Alice <alice@project.com>
Message: I fixed a bug!
@@ -100,1 +100,1 @@
-     if (i <= 128) {
+     if (i < 128) {
```

Blame of previous version


```
f4ce718c ... 100     if (i <= 128) {
```

Creating Connections

Definition

A “buggy” or **introducing commit** is a commit changed by at least one fixing commit

Introducing commit(s)



- Find the bug fixing commits using a keyword search for “fix”
- Keyword search precision of 86%–87% and recall of 71%–73%


Additional Information

- Record the following
 - Commit times (local and UTC)
 - Authors merged by same name/email
 - Number of lines changed in code/comments/other in commit
- We can now determine
 - Whether a commit contains a bug and how many fixes were applied
 - Developer experience
 - Bug lifetime


Repositories

	Linux kernel	PostgreSQL
First commit	April 16, 2005	July 9, 1996
Last commit	Nov. 21, 2010	Jan. 24, 2011
Lines of code	over 5 million	over 750,000
Number of authors	6,504	34
Total commits	222,332	31,098
Introducing commits	56,590 (25.5%)	7,388 (23.8%)
Fixing commits	61,044	6,578


Linux - Most Commits Late Afternoon

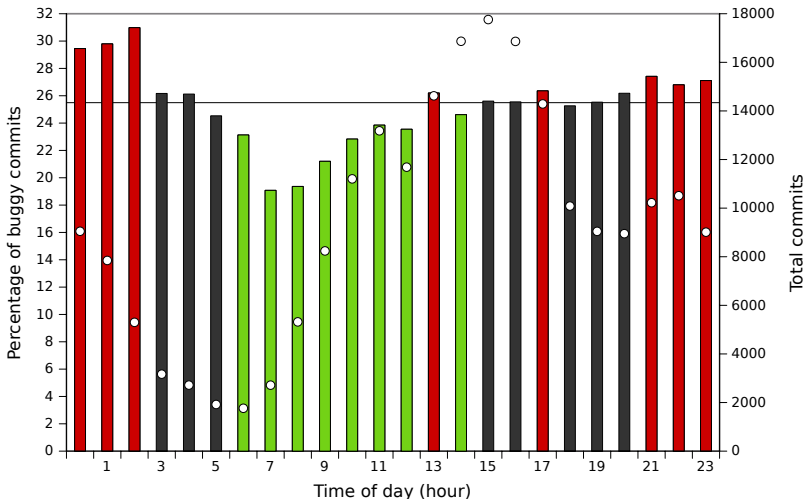


Linux - Late Night Commits are Up To 21% More Buggy

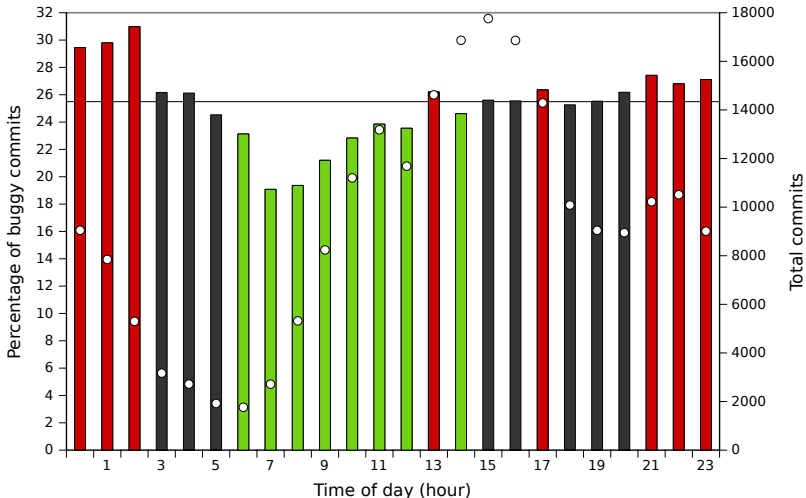


Linux - Early Morning Commits Produce Up To 25% Fewer Bugs

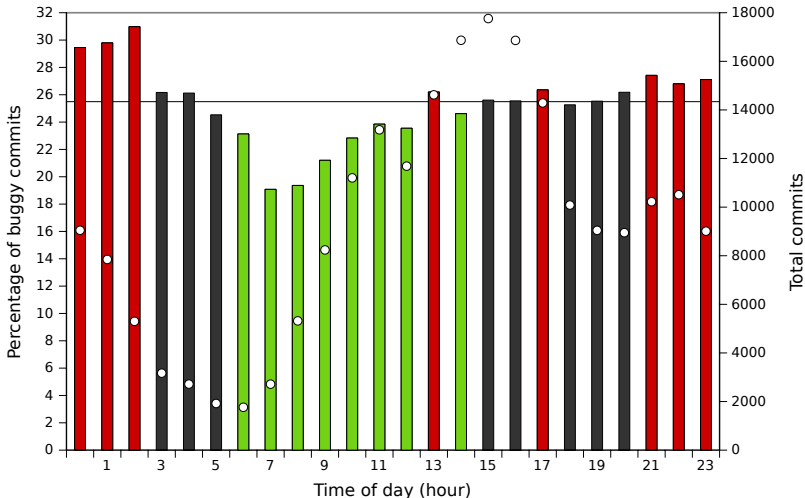


PostgreSQL - Most Commits In Evening

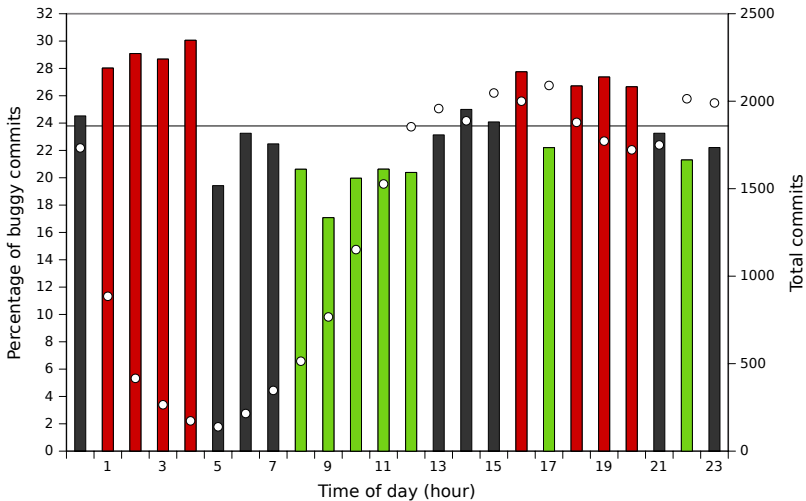

PostgreSQL - Late Night Commits are Up To 27% More Buggy

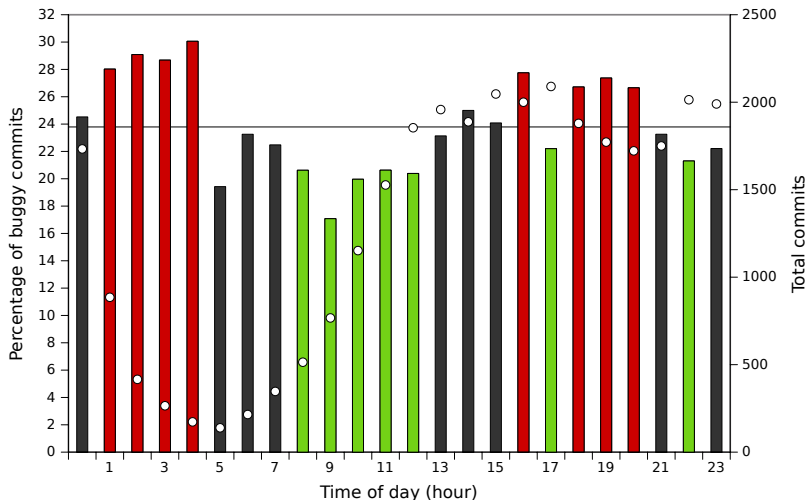

PostgreSQL - Early Morning Commits Produce Up To 28% Fewer Bugs

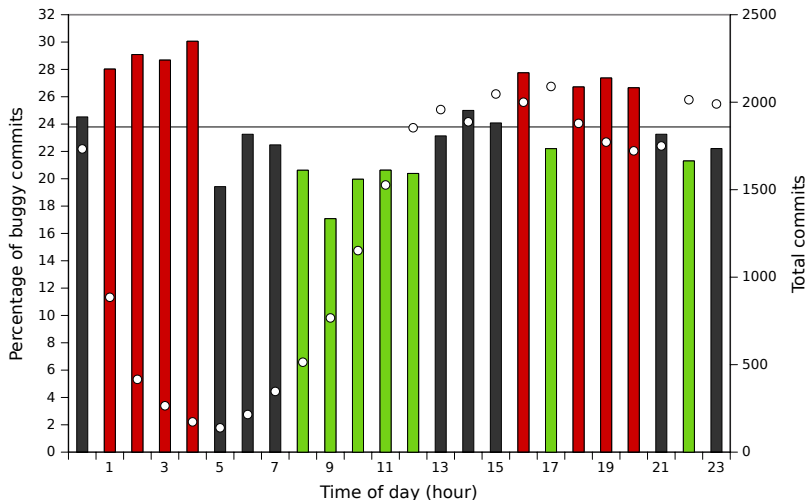


Our Definition of Experience

Definition


Experience is the number of days from the author's first commit to the current commit

- Consider two of an author's commits who started on May 1st
 - May 1st
 - May 22nd
- First commit would be 0 days experience and second 21 days

Linux - More Experienced Developers Commit Fewer Bugs

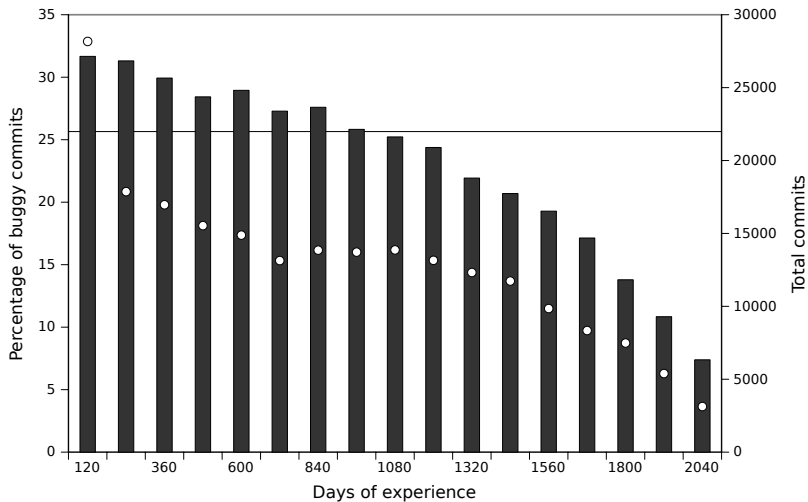

PostgreSQL - More Experienced Developers Commit Fewer Bugs

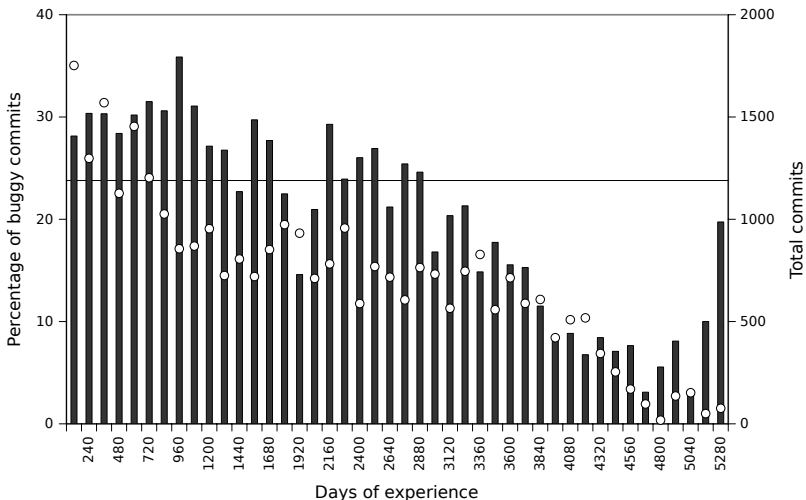

Our Frequency Classifications

- Based on frequency
- Daily, weekly, monthly, single


Definition

“Job” is a daily committer with the majority of commits between working hours


Definition

“Other” is a committer with fewer than 20 commits


Linux - More Active Developers Commit Fewer Bugs

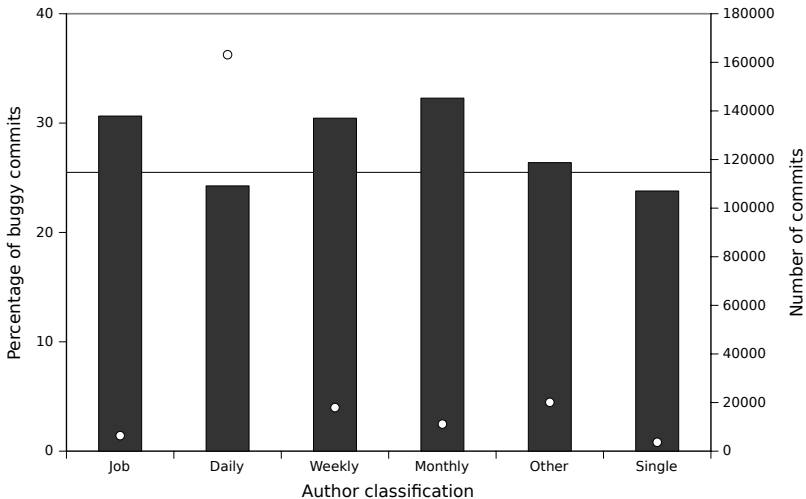


Linux - Inexperienced Developers Have More Late Night Commits

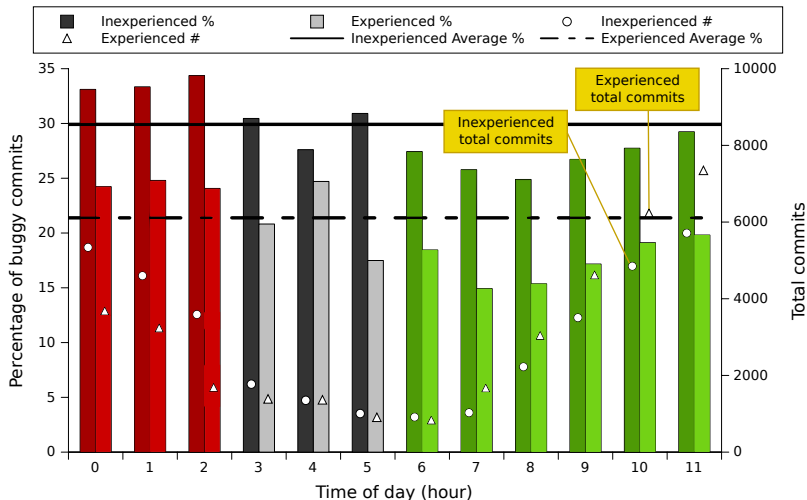


Linux - Both Sets of Developers Have Similar Good and Bad Hours

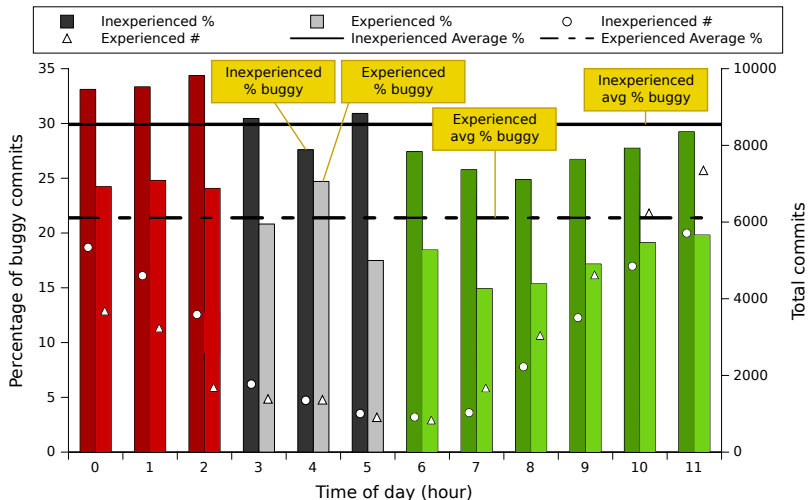


Linux - More Bugs Committed on Monday

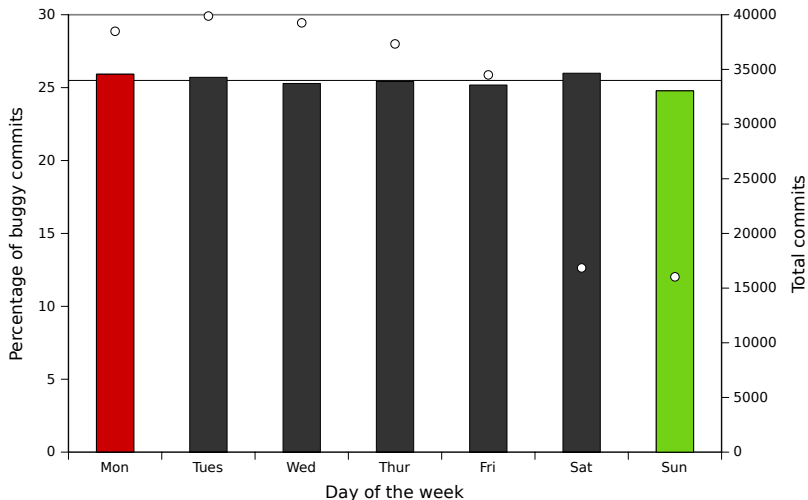


Linux - Fewer Bugs Committed on Sunday

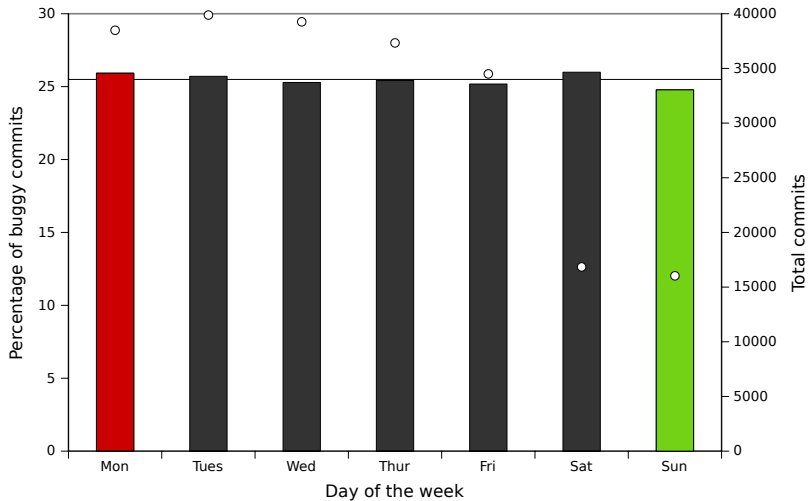

PostgreSQL - More Bugs Committed on Sunday

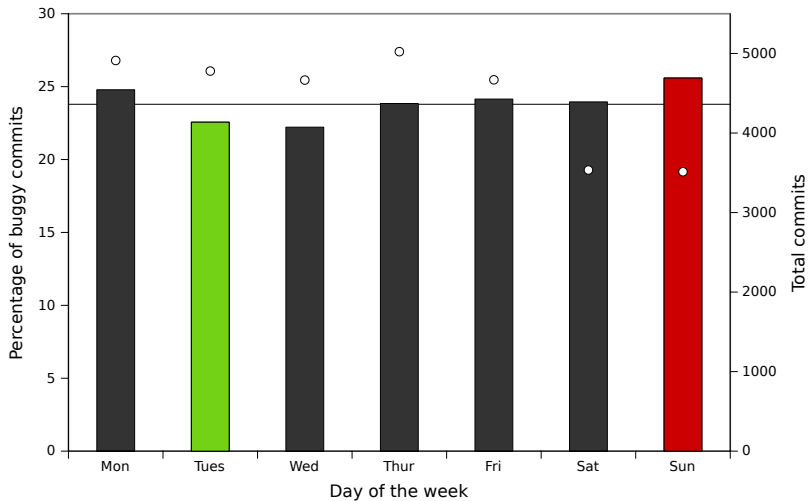

PostgreSQL - Fewer Bugs Committed on Tuesday

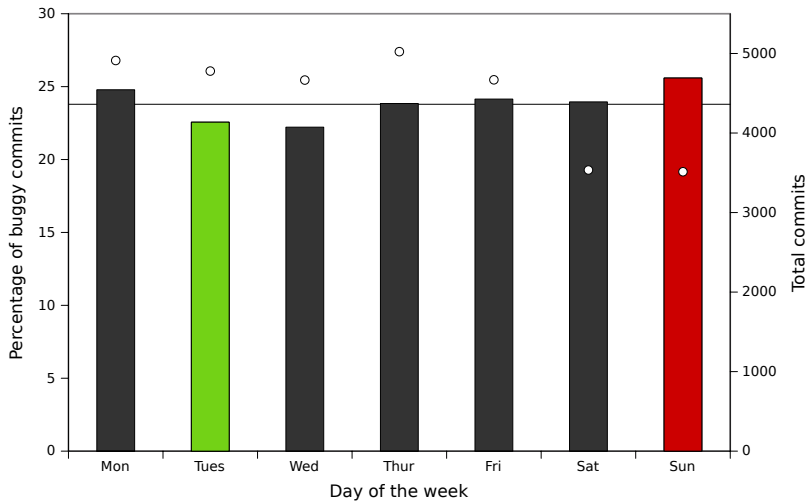

Definition

Bug lifetime is the number of days from a fixing commit to the earliest bug introducing commit

- Found the average bug lifetime was
 - 1.38 years ($\sigma = 1.35$) for Linux
 - 3.07 years ($\sigma = 3.19$) for PostgreSQL

Previous Studies

- Commits for Eclipse and Mozilla were found to be buggiest on Fridays [Śliwerski et al., 2005, MSR]
- Classification of commits into different categories [Hindle et al., 2008, MSR]
- Bug lifetimes for PostgreSQL [Kim and Whitehead Jr, 2006, MSR]
 - Average of 2 years




For the Future

- Study individual developers
 - Are commits outside their normal schedule worse?
 - Experience including other open-source projects?
- More software projects
- Correlations involving code quality
- Prediction models

Summary of Findings

- Commits between midnight and 4 AM are more likely to be buggy
- Commits between 7 AM and noon are less likely to be buggy
- More active developers commit fewer bugs
- More experienced developers commit fewer bugs
- The worst day of the week varies between projects

References

-  Hindle, A., German, D. M., and Holt, R. (2008).
What do large commits tell us?: A taxonomical study of large commits.
In *MSR*, pages 99–108.
-  Kim, S. and Whitehead Jr, E. (2006).
How long did it take to fix bugs?
In *MSR*, pages 173–174.
-  Śliwerski, J., Zimmermann, T., and Zeller, A. (2005).
When do changes induce fixes?
In *MSR*, pages 24–28.

Summary of Findings

- Commits between midnight and 4 AM are more likely to be buggy
- Commits between 7 AM and noon are less likely to be buggy
- More active developers commit fewer bugs
- More experienced developers commit fewer bugs
- The worst day of the week varies between projects